

NL000601
US



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

1c120 U.S. PTO
10/022382
11/30/01

Bescheinigung

Certificate

Attestation

Die angehefteten Unterla-
gen stimmen mit der
ursprünglich eingereichten
Fassung der auf dem näch-
sten Blatt bezeichneten
europäischen Patentanmel-
dung überein.

The attached documents
are exact copies of the
European patent application
described on the following
page, as originally filed.

Les documents fixés à
cette attestation sont
conformes à la version
initialement déposée de
la demande de brevet
européen spécifiée à la
page suivante.

Patentanmeldung Nr. Patent application No. Demande de brevet n°

00203809.9

Der Präsident des Europäischen Patentamts;
Im Auftrag

For the President of the European Patent Office

Le Président de l'Office européen des brevets
p.o.

I.L.C. HATTEN-HECKMAN

DEN HAAG, DEN
THE HAGUE, 01/06/01
LA HAYE, LE

THIS PAGE BLANK (USPTO)



Europäisches
Patentamt

European
Patent Office

Office européen
des brevets

Blatt 2 der Bescheinigung
Sheet 2 of the certificate
Page 2 de l'attestation

Anmeldung Nr.:
Application no.:
Demande n°: 00203809.9

Anmeldetag:
Date of filing:
Date de dépôt: 01/11/00

Anmelder:
Applicant(s):
Demandeur(s):
Koninklijke Philips Electronics N.V.
5621 BA Eindhoven
NETHERLANDS

Bezeichnung der Erfindung:
Title of the invention:
Titre de l'invention:
Processing of color signals in a color camera

In Anspruch genommene Priorität(en) / Priority(ies) claimed / Priorité(s) revendiquée(s)

Staat:
State:
Pays:

Tag:
Date:
Date:

Aktenzeichen:
File no.
Numéro de dépôt:

Internationale Patentklassifikation:
International Patent classification:
Classification internationale des brevets:

/

Am Anmeldetag benannte Vertragsstaaten:
Contracting states designated at date of filing: AT/BE/CH/CY/DE/DK/ES/FI/FR/GB/GR/IE/IT/LI/LU/MC/NL/PT/SE/TR
Etats contractants désignés lors du dépôt:

Bemerkungen:
Remarks:
Remarques:

THIS PAGE BLANK (USPTO)

Processing of color signals in a color camera

EPO - DG 1

01 11. 2000



The invention relates to a method and device for processing color signals in a color camera, and to a color camera comprising such a device.

In a color camera, white balance is achieved when a neutral white object
5 image by the camera under given illumination, is represented as red, green and blue signals having equal output levels. White balance is needed since the RGB representation produced by a color camera typically changes as the illumination of a scene varies. In some circumstances, a color camera white balance for certain illumination conditions, will not be white balanced for other illumination conditions. As a result, it is possible that an object
10 under two different illuminations will have two different RGB representations even though a human observer would perceive the object as having the same color under both illuminations. In a known camera an image is captured by an RGB sensor. The output of this sensor contains basic analog color signals wherein each of the signals corresponds to a gain in one of the basic colors. These analog color signals are subsequently converted into at least one
15 digital signal. The at least one digital signal is further subjected to a reconstruction method for obtaining reconstructed signals. The reconstructed signals comprise a first basic color signal R, a second basic color signal G and a third basic color signal B. These reconstructed signals are then further subjected to a correction method for obtaining standardized signals, suitable for worldwide acceptance. This correction method comprises of a multiplication of a
20 three color signal matrix containing the first, second and third basic color signal R, G, and B by a correction matrix containing nine adjustable coefficients. In a usual color camera the white balance method is then applied to the standardized signals.

A disadvantage of this method is that quantization errors occurring during the
A/D conversion step remain present in at least one of the standardized signals.

25 The object of the invention is to meet this problem and to minimize the quantization errors in the fully processed signals. To this end, the invention provides a processing method and device, and a color camera as defined by the independent claims. The dependent claims define advantageous embodiments.

Preferably, the invention provides a method and device for processing analog color signals, comprising:

analog preprocessing sensor output signals to obtain analog preprocessed signals that cause a reduced amount of digital quantization errors;

5 converting the analog preprocessed signals into digital signals;

reconstructing a first basic color signal (R), a second basic color signal (G), and a third basic color signal (B) from the digital signals; and

correcting the basic color signals to obtain standardized signals, in which a three color signal matrix containing the first, second and third basic color signals (R, G, B) is multiplied by a correction matrix containing coefficients that depend on the analog preprocessing.

In a first embodiment, the analog preprocessing includes a white balance adjustment. An advantage of applying the white balance method before the analog color signals are converted into at least one digital signal is that the quantization errors in at least one of the basic color signals is minimized. An advantage of this method and this camera is that the white balance method is applied to signals that are free from quantization errors, ultimately lowering the quantization errors in the fully processed signals.

In a second embodiment, the horizontal sum values of the correction matrix are adjusted to one for horizontal sum values larger than one, with the analog preprocessing comprising a corresponding multiplication in the analog preprocessing to ensure to the overall processing multiplication remains the same as in the prior art. An advantage is that this multiplication leads to smaller quantization errors. An advantage is that the amplification is apart from being cursed with lower quantization errors, not further effected.

These and other aspects of the invention will be apparent from, and elucidated with reference to, the embodiments described hereafter.

In the drawings:

Fig. 1 shows an embodiment of the method in accordance with the first aspect of the present invention; and

30 Fig. 2 shows a second embodiment of the method in accordance with the second aspect of the present invention.

In both methods according to the invention for processing basic color signals in a color camera, light is collected and directed via a lens L into a sensor 1, preferably an

RGB Bayer sensor supplying a single signal in which the color signals are multiplexed in accordance with the color mask on the sensor (line-alternatingly RGRG... and GBGB...).

The signals correspond to a gain in the basic colors. According to a first aspect of the

invention, as shown in Fig. 1, these signals are pre-processed according to a white balance

5 method 3 and then submitted to an analog/digital converter (ADC) 5. The digital signal is then subjected to a reconstruction method carried out by the RGB reconstruction unit 7 that

generates all 3 RGB signals for each pixel where the sensor output signal had only one of

these RGB signals for each pixel. The reconstructed signals comprise a first basic color

signal R, a second basic color signal G, and a third basic color signal B. These basic color

10 signals need to be corrected to the EBU standardized signals to which television sets and PC monitors worldwide are accustomed to. This correction comprises multiplication of a three

color signal matrix containing the first, the second, and the third basic color signal R, G, B by

a correction matrix containing nine adjustable coefficients referred to as a_{xy} with x being 1,

2 or 3 and y being 1, 2 or 3. Mathematically this is expressed as follows:

$$15 \quad \begin{bmatrix} R_o \\ G_o \\ B_o \end{bmatrix} = \begin{bmatrix} a_{11} & a_{12} & a_{13} \\ a_{21} & a_{22} & a_{23} \\ a_{31} & a_{32} & a_{33} \end{bmatrix} \times \begin{bmatrix} R_i \\ G_i \\ B_i \end{bmatrix} \quad (1)$$

wherein R_o, G_o and B_o are the output RGB signals and R_i, G_i, B_i the input RGB signals of

the matrix 9. The standardized output signals R_o, G_o and B_o are then further processed as

well as submitted to a white-balance-measurement- and-matrix-control-unit A. By this unit A

the total contribution of each color measured over the whole scene, with the option that it is

20 allowed to limit the number of pixels if they are distributed over that scene, is measured. To

further illustrate the method according to the invention, the World Gray Assumption method

is applied as an example of a white balance method. In the WGA method $awbR$ is total

contribution of Red/total contribution of Green and $awbB$ is total contribution of Blue/total

contribution of Green as measured/determined by unit A. These parameters $awbR$ and $awbB$

25 based on the standardized signals R_o, G_o and B_o are used for regulation of the white

balanced method. The white balanced method as applied to the analog basic color signals

R_a, G_a and B_a involves then a multiplication with the parameters contained from the white-

balance-measurement-and-matrix-control-unit A. Using the WGA method as the white

balance method, the regulation would involve a multiplication of the basic color signals

30 R_a, G_a, B_a according to:

$$\begin{aligned}
 R_{awb} &= awbR \times R_a \\
 G_{awb} &= G_a \\
 B_{awb} &= awbB \times B_a
 \end{aligned} \tag{2}$$

As a result, the white balance gains for red and blue are normalized to that of green.

The input of the RGB reconstruction unit 7 is then:

$$\begin{aligned}
 R_i &= awbR \times R_i \\
 G_i &= awbR \times G_i \\
 B_i &= awbB \times B_i
 \end{aligned} \tag{3}$$

where the prime refers to the fact that the signals have been subjected to the white balance method.

After subjection to the correction method for standardization, i.e. after multiplication by the matrix the basic color signals follow:

$$\begin{bmatrix} R_o \\ G_o \\ B_o \end{bmatrix} = \begin{bmatrix} a_{11} & a_{12} & a_{13} \\ a_{21} & a_{22} & a_{23} \\ a_{31} & a_{32} & a_{33} \end{bmatrix} \times \begin{bmatrix} awbR \times R_i \\ G_i \\ awbB \times B_i \end{bmatrix} \tag{4}$$

It must be clear that the matrix coefficients must be adjusted from their values valid for the prior art situation in which the white balance method takes place after the matrix 9 to settings which will be valid for the situation of Fig. 1 in which the white balance 3 takes place before the matrix 9. To this end the output of the white balance method is calculated for the situation in which the white balance method takes place after multiplication of the signals by the matrix. Assuming that the WGA method is applied, the output would have been:

$$\begin{bmatrix} R_o' \\ G_o' \\ B_o' \end{bmatrix} = \begin{bmatrix} a_{11} & (a_{12} \times awbR) & a_{13} \\ (a_{21}/awbR) & a_{22} & (a_{23}/awbB) \\ a_{31} & (a_{32} \times awbB) & a_{33} \end{bmatrix} \times \begin{bmatrix} awbR \times R_i \\ G_i \\ awbB \times B_i \end{bmatrix} \tag{5}$$

Comparing formulas 4 and 5 it is clear that the original matrix coefficients a_{xy} have to be adjusted to matrix coefficients b_{xy} with x being 1,2, 3 and y being 1,2, or 3, wherein,

$$\begin{aligned}
b_{11} &= a_{11} \\
b_{12} &= a_{12} \times awbR \\
b_{13} &= a_{13} \\
b_{21} &= a_{21} / awbR \\
b_{22} &= a_{22} \\
b_{23} &= a_{23} / awbB \\
b_{31} &= a_{31} \\
b_{32} &= a_{32} \times awbB \\
b_{33} &= a_{33}
\end{aligned} \tag{6}$$

New values for the matrix coefficients are calculated by the amplifier control and matrix control unit. The calculation is ideally executed by a micro-controller. The method is, in that case, continuously applicable. At the output of the matrix 9 there may a gamma correction and an RGB to YUV conversion, both not shown.

Another method useful for reducing the quantization errors is shown in Fig. 2, according to another aspect of the invention. In this method the analog color signals are amplified by an amplifier 2. The analog color signals are to this end multiplied by a factor at least as large as 1 as further elaborated on in the following. To outline this method, the sum of the horizontal matrix coefficients is written as:

$$\begin{aligned}
\Sigma R &= a_{11} + a_{12} + a_{13} \\
\Sigma G &= a_{21} + a_{22} + a_{23} \\
\Sigma B &= a_{31} + a_{32} + a_{33}
\end{aligned} \tag{7}$$

More specifically the method involves a multiplication of the first, second and third analog basic color signal R_a , G_a and B_a from the sensor 1 by the following factors: cR , cG and cB . The values of cR , cG and cB are determined by the following rules:

if $\Sigma R > 1$ then $cR = \Sigma R$ else $cR = 1$
if $\Sigma G > 1$ then $cG = \Sigma G$ else $cG = 1$
if $\Sigma B > 1$ then $cB = \Sigma B$ else $cB = 1$

To maintain the original signal amplitude, the reconstructed signals need to be subjected to a compensation for the amplification. The correction for standardization should therefore be as follows:

$$5 \quad \begin{bmatrix} R_o' \\ G_o' \\ B_o' \end{bmatrix} = \begin{bmatrix} (a_{11})/aR & (a_{12})/aG & (a_{13})/aB \\ (a_{21})/aR & (a_{22})/aG & (a_{23})/aB \\ (a_{31})/aR & (a_{32})/aG & (a_{33})/aB \end{bmatrix} \times \begin{bmatrix} (aR \times Ri) \\ (aG \times Gi) \\ (aB \times Bi) \end{bmatrix} \quad (9)$$

It follows then that the original matrix coefficients $x \times y$ need to be replaced by coefficients b_{xy} with x being 1, 2 or 3 and y being 1, 2 or 3, according to the following rules:

$$10 \quad \begin{aligned} b_{11} &= a_{11} / cR \\ b_{12} &= a_{12} / cG \\ b_{13} &= a_{13} / cB \\ b_{21} &= a_{21} / cR \\ b_{22} &= a_{22} / cG \\ b_{23} &= a_{23} / cR \\ b_{31} &= a_{31} / cR \\ b_{32} &= a_{32} / cG \\ b_{33} &= a_{33} / cB \end{aligned} \quad (10)$$

where b_{xy} , with x being 1, 2, 3 and y being 1, 2, or 3, represent the new matrix coefficients.

The white balance method 11 can now be applied to the compensated reconstructed signals which are cursed with lower quantization errors, compared to the known method. The replacement of the matrix coefficients by the newly derived matrix coefficients only take

15 place once, for instance when the camera is switched on. The replacement of a_{xy} with b_{xy} and the regulation of the amplifier is carried out by the amplifier control & matrix control unit B.

Salient aspects of the present invention include the idea of improving the digital quantization by shifting certain camera functions (white balance or default adjustment of the correction matrix) from the digital domain to the analog domain. The realization of the white balance on the multiplexed analog raw data from the RGB Bayer image sensor means that less quantization errors will occur in the red and blue color signals. For improving the

digital quantization, the matrix in the digital domain is preferably continuously corrected in case of a continuously changing white balance in the analog domain; hereby, the color reproduction is maintained in comparison with a full digitized method using first the matrix and thereafter the white balance. Alternatively, in the analog domain, the horizontal sum of the correction matrix coefficients is adjusted in such a way, that in the digital domain, the horizontal sum is almost unity. The used method guarantees the maintenance of color reproduction and has to be executed only once, for example if the camera is switched on.

Although embodiments of the present invention have been described in detail herein, it is to be understood that this invention is not limited to these precise embodiments and that modifications and variations may be effected therein by one skilled in the art without departing from the scope of the invention as defined by the appended claims. In the claims, any reference signs placed between parentheses shall not be construed as limiting the claim. The word "comprising" does not exclude the presence of elements or steps other than those listed in a claim. The word "a" or "an" preceding an element does not exclude the presence of a plurality of such elements. The invention can be implemented by means of hardware comprising several distinct elements, and by means of a suitably programmed computer. In the device claim enumerating several means, several of these means can be embodied by one and the same item of hardware. The mere fact that certain measures are recited in mutually different dependent claims does not indicate that a combination of these measures cannot be used to advantage.

THIS PAGE BLANK (USPTO)

CLAIMS:

01.11.2000

(91)

1. A method of processing analog color signals, the method comprising:
 analog preprocessing (2, 3) sensor output signals to obtain analog
 preprocessed signals that cause a reduced amount of digital quantization errors;
 converting (5) the analog preprocessed signals into digital signals;
 5 reconstructing (7) a first basic color signal (R), a second basic color signal
 (G), and a third basic color signal (B) from the digital signals; and
 correcting (9) the basic color signals to obtain standardized signals, the
 correcting step comprising multiplication of a three color signal matrix containing the first,
 second and third basic color signals (R, G, B) by a correction matrix containing coefficients
 10 that depend on the analog preprocessing step (2, 3).

2. A method according to claim 1, wherein the analog preprocessing step
 includes a white balance adjustment.

15 3. A method according to claim 2, wherein the coefficients of the correction
 matrix depend on the analog preprocessing step in that correction matrix coefficients a_{xy} are
 replaced by coefficients b_{xy} with

$$b_{11} = a_{11}$$

$$b_{12} = a_{12} \times awbR$$

$$b_{13} = a_{13}$$

$$b_{21} = a_{21} / awbR$$

$$b_{22} = a_{22}$$

$$b_{23} = a_{23} / awbB$$

$$b_{31} = a_{31}$$

$$b_{32} = a_{32} \times awbB$$

$$b_{33} = a_{33}$$

(6)

wherein $awbR$ equals a total contribution of Red divided by a total contribution of Green
 20 and $awbB$ equals a total contribution of Blue divided by a total contribution of Green

wherein the total contributions of Red, Green and Blue are determined from the standardized signals.

4. A method according to claim 1, wherein the sensor output signals comprise

5 first, second and third analog color signals R_a , G_a and B_a , and wherein said analog preprocessing step includes respectively multiplying the color signals by

cR

cG

cB

where $cR = \sum R$ if $\sum R > 1$, else $cR = 1$;

where $cG = \sum G$ if $\sum G > 1$ else $cG = 1$;

10 where $cB = \sum B$ if $\sum B > 1$ else $cB = 1$, with

$$\sum R = a_{11} + a_{12} + a_{13}$$

$$\sum G = a_{21} + a_{22} + a_{23}$$

$$\sum B = a_{31} + a_{32} + a_{33}$$

with a_{xy} being the coefficients the correction matrix would have without the analog

preprocessing step, and wherein the coefficients a_{xy} of the correction matrix are replaced by

coefficients b_{xy} with

$$15 \quad b_{xy} = a_{xy} / cR \quad \text{for } x = 1, 2, 3 \quad \text{and} \quad y = 1;$$

$$b_{xy} = a_{xy} / cG \quad \text{for } x = 1, 2, 3 \quad \text{and} \quad y = 2;$$

$$b_{xy} = a_{xy} / cB \quad \text{for } x = 1, 2, 3 \quad \text{and} \quad y = 3.$$

5. A device for processing analog color signals, the device comprising:

20 means for analog preprocessing (2, 3) sensor output signals to obtain analog preprocessed signals that cause a reduced amount of digital quantization errors;

means for converting (5) the analog preprocessed signals into digital signals;

means for reconstructing (7) a first basic color signal (R), a second basic color signal (G), and a third basic color signal (B) from the digital signals; and

25 means for correcting (9) the basic color signals to obtain standardized signals, the correcting means comprising means for multiplying a three color signal matrix containing

the first, second and third basic color signals (R, G, B) by a correction matrix containing coefficients that depend on the analog preprocessing means (2, 3).

6. A device according to claim 5, wherein the analog preprocessing means (3)
5 includes means (3) for carrying out a white balance adjustment.

7. A method according to claim 6, wherein the coefficients of the correction matrix depend on the analog preprocessing step in that correction matrix coefficients a_{xy} are replaced by coefficients b_{xy} with

$$\begin{aligned}
 b_{11} &= a_{11} \\
 b_{12} &= a_{12} \times awbR \\
 b_{13} &= a_{13} \\
 b_{21} &= a_{21} / awbR \\
 10 \quad b_{22} &= a_{22} \\
 b_{23} &= a_{23} / awbB \\
 b_{31} &= a_{31} \\
 b_{32} &= a_{32} \times awbB \\
 b_{33} &= a_{33}
 \end{aligned} \tag{6}$$

wherein $awbR$ equals a total contribution of Red divided by a total contribution of Green and $awbB$ equals a total contribution of Blue divided by a total contribution of Green wherein the total contributions of Red, Green and Blue are determined from the standardized signals.

15

8. A device according to claim 5, wherein the sensor output signals comprise first, second and third analog color signals R_a, G_a and B_a , and wherein said analog preprocessing means (2) includes means (2) for respectively multiplying the color signals by

 cR cG cB

$$\begin{aligned}
 20 \quad \text{where} \quad cR &= \sum R & \text{if } \sum R > 1, & \quad \text{else} \quad cR = 1; \\
 \text{where} \quad cG &= \sum G & \text{if } \sum G > 1, & \quad \text{else} \quad cG = 1; \\
 \text{where} \quad cB &= \sum B & \text{if } \sum B > 1, & \quad \text{else} \quad cB = 1, \quad \text{with}
 \end{aligned}$$

$$\sum R = a_{11} + a_{12} + a_{13}$$

$$\sum G = a_{21} + a_{22} + a_{23}$$

$$\sum B = a_{31} + a_{32} + a_{33}$$

with a_{xy} being the coefficients the correction matrix would have without the analog

preprocessing step, and wherein the coefficients a_{xy} of the correction matrix are replaced by

coefficients b_{xy} with

$$5 \quad b_{xy} = a_{xy} / cR \quad \text{for } x = 1, 2, 3 \quad \text{and} \quad y = 1;$$

$$b_{xy} = a_{xy} / cG \quad \text{for } x = 1, 2, 3 \quad \text{and} \quad y = 2;$$

$$b_{xy} = a_{xy} / cB \quad \text{for } x = 1, 2, 3 \quad \text{and} \quad y = 3.$$

9. A color camera comprising:
- 10 a sensor for generating sensor output signals; and
- a device as claimed in claim 5.

ABSTRACT:

EPO - DG 1

01.11.2000

(91)

A method and device for processing analog color signals, comprising:
analog preprocessing (3) sensor output signals to obtain analog preprocessed
signals that cause a reduced amount of digital quantization errors;
converting (5) the analog preprocessed signals into digital signals;
5 reconstructing (7) a first basic color signal (R), a second basic color signal
(G), and a third basic color signal (B) from the digital signals; and
correcting (9) the basic color signals to obtain standardized signals, in which a
three color signal matrix containing the first, second and third basic color signals (R, G, B)
is multiplied by a correction matrix containing coefficients that depend on the analog
10 preprocessing (3).

In a first embodiment, the analog preprocessing includes a white balance
adjustment. In a second embodiment, the horizontal sum values of the correction matrix are
adjusted to one for horizontal sum values larger than one, with the analog preprocessing
comprising a corresponding multiplication in the analog preprocessing to ensure to the
15 overall processing multiplication remains the same as in the prior art.

The invention further relates to a color camera comprising an RGB Bayer
sensor for generating the sensor output signals, and the above-mentioned processing device.

(Fig. 1)

THIS PAGE BLANK (USPTO)

EPO - DG 1
01.11.2000

(91)

1/1

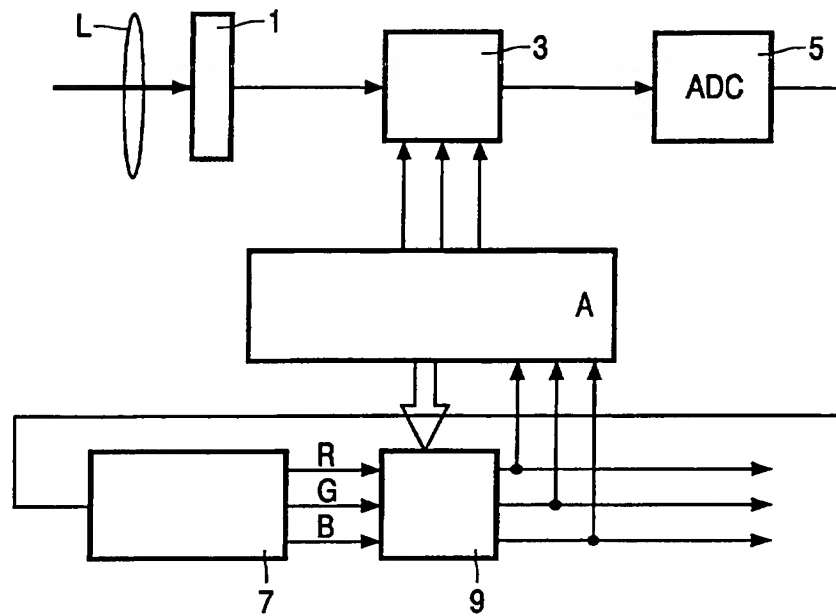


FIG. 1

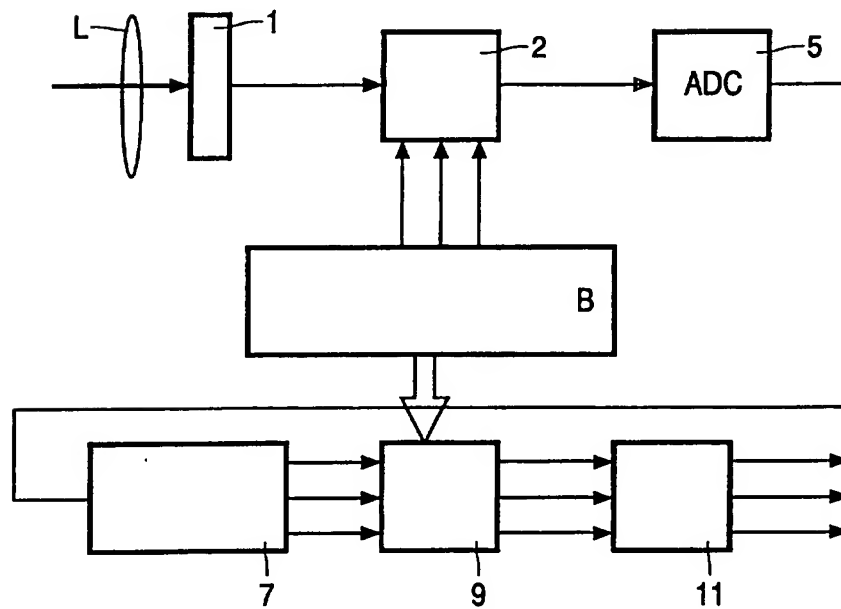


FIG. 2

THIS PAGE BLANK (USPTO)